




Powering Productivity. Every™ Engine.

QSX11.9 And QSX15 (290-600 hp)
Tier 4 Interim/Stage IIIB

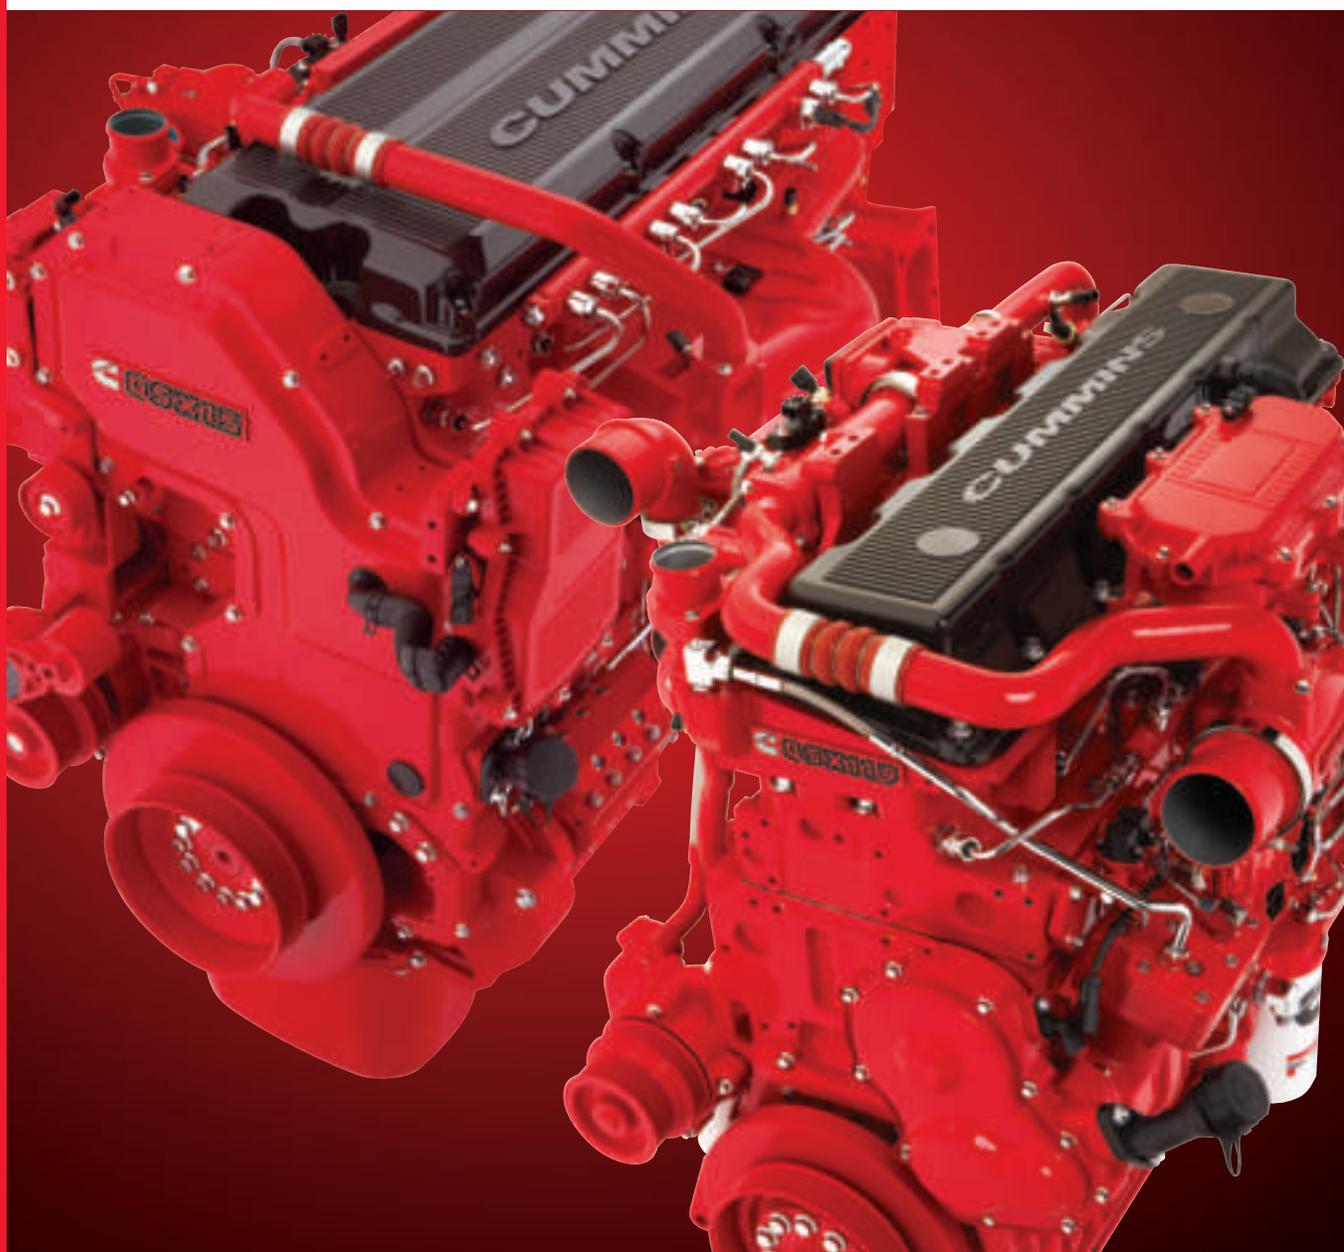


Powering Productivity. Every™ Engine.

Better Performance. Every Time.

At Cummins, we're driving higher productivity with quicker engine response, a torque rise of up to 50%, and reduced operating costs with up to 5% better fuel economy. The QSX11.9 and QSX15 engines are designed and built to make every piece of off-highway equipment more efficient.

EPA Tier 4 Interim/Euro Stage IIIB regulations took effect January 1, 2011. The regulations require a major reduction of Particulate Matter (PM) and also require significant oxides of nitrogen (NOx) reductions. These new emissions standards drive the need for cooled Exhaust Gas Recirculation (EGR) – a proven technology since 2002 – and the Cummins Particulate Filter exhaust aftertreatment. The Cummins Particulate Filter requires no operator action during normal operation, and reduces particulate matter by 90%.

Cummins QSX11.9 and the QSX15 are designed with a common architecture and share many of the same components, key performance systems and electronic control systems. We've taken proven technology and used it across the board, for enhanced reliability and durability in construction, agriculture, materials handling and other types of rugged industrial applications.

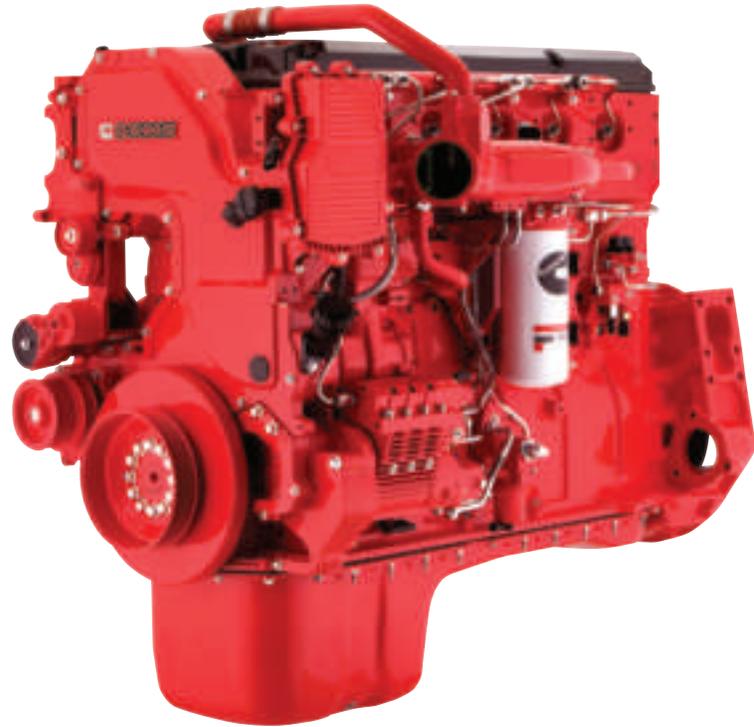



We are distinct from other engine manufacturers because we design and manufacture every key component and subsystem ourselves, utilizing a fully integrated approach to optimize performance from our Direct Flow™ air filter, Cummins VGT™ Turbocharger and Xtra-High Pressure Injection (XPI) fuel system to the Cummins Particulate Filter.

Extensive field-testing in a variety of equipment has shown significantly faster engine response and equal reliability compared to our best Tier 3 engines, all with the incorporation of our aftertreatment system. In addition, equipment operators will appreciate significantly lower noise levels with smoother engine operation.

From a maintenance and service standpoint, our tools are ready. Both QuickCheck 5200 and QuickServe® Online are equipped for the most recent emissions standards, fully supported by the most capable support network in the business.

The QSX11.9 and QSX15 represent the next step in the evolution of Cummins technology, building on proven expertise to deliver the durable, dependable performance and exceptional productivity that you've come to rely on. Every engine. Every time.

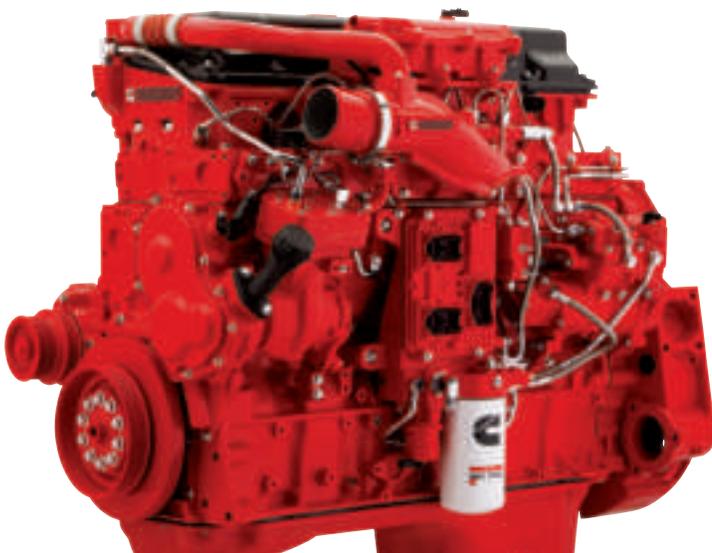

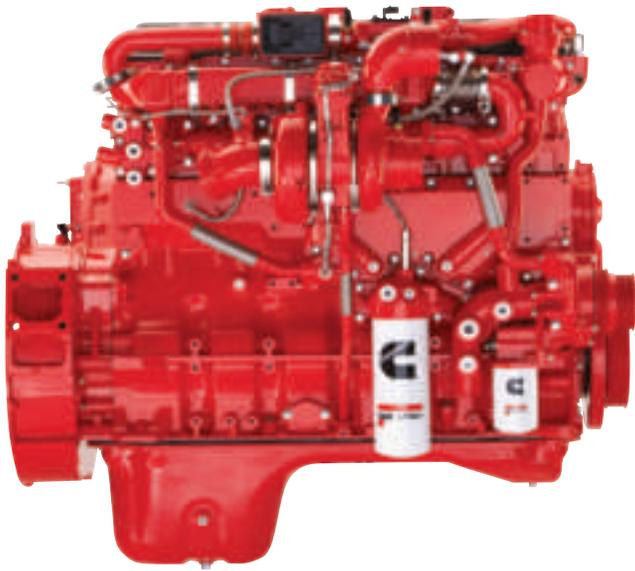

Cummins QSX11.9.

The key to success is building upon your strengths. The proof is Cummins Tier 4 Interim/Stage IIIB QSX11.9. We've taken everything we've learned with the Cummins QSM engine and combined it with the advanced technology platform of the QSX15. The result is a compact engine with 290-500 hp (216-373 kW) and up to 1600 lb-ft (2169 N•m) of peak torque. The QSX11.9 has one of the highest power-to-weight ratios in its class, and its remarkable torque rise (up to 50%) enables the engine to more quickly take full advantage of the torque power – just as rpm speed falls due to tougher working conditions.

Reliability, durability and productivity are similar to the QSX15, because the QSX11.9 shares virtually every major component and subsystem. This includes the XPI fuel injection system, Direct Flow air filter, the Cummins CM2250 Electronic Control Module (ECM), our proprietary Cummins VGT Turbocharger and the Cummins Particulate Filter.

The addition of the Cummins Particulate Filter reduces particulate matter emissions by over 90%, while the cooled-EGR subsystem reduces NOx emissions by 45%.

QSX11.9 Ratings

ENGINE MODEL	RATED HP(KW) @ RPM	PEAK HP(KW) @ RPM	PEAK TORQUE LB-FT(N•M) @ RPM
QSX11.9 500*	500 (373) @ 1800	500 (373) @ 1800	1600 (2169) @ 1400
QSX11.9 475*	475 (354) @ 1800	475 (354) @ 1800	1600 (2169) @ 1400
QSX11.9 460*	460 (343) @ 2100	500 (373) @ 1800	1600 (2169) @ 1400
QSX11.9 450	450 (336) @ 1800	450 (336) @ 1800	1600 (2169) @ 1400
QSX11.9 435**	435 (324) @ 1900	450 (336) @ 1800	1600 (2169) @ 1400
QSX11.9 430	430 (321) @ 1800	430 (321) @ 1800	1500 (2034) @ 1400
QSX11.9 425*	425 (317) @ 1800	475 (354) @ 1800	1600 (2169) @ 1400
QSX11.9 400	400 (298) @ 2100	450 (336) @ 1800	1600 (2169) @ 1400
QSX11.9 400	400 (298) @ 2100	425 (317) @ 1800	1500 (2034) @ 1400
QSX11.9 400	400 (298) @ 1800	400 (298) @ 1800	1450 (1966) @ 1400
QSX11.9 375	375 (280) @ 2100	415 (309) @ 1800	1450 (1966) @ 1400
QSX11.9 375**	375 (280) @ 1900	375 (280) @ 1800	1350 (1830) @ 1400
QSX11.9 375**	375 (280) @ 1800	375 (280) @ 1800	1350 (1830) @ 1400
QSX11.9 355	355 (265) @ 2000	370 (276) @ 1800	1250 (1695) @ 1400
QSX11.9 350	350 (261) @ 2100	385 (287) @ 1800	1350 (1830) @ 1400
QSX11.9 350**	350 (261) @ 1800	385 (287) @ 1800	1350 (1830) @ 1400
QSX11.9 335	335 (250) @ 2100	370 (276) @ 1800	1250 (1695) @ 1400
QSX11.9 290	290 (216) @ 2100	320 (239) @ 1800	1090 (1478) @ 1400

QSX11.9 Specifications

Engine Type	In-Line, 6-Cylinder	
Displacement	726 cu in	11.9 Liters
Rated Power	290-500 hp	216-373 kW
Peak Torque	1090-1600 lb-ft	1478-2169 N•m
Bore and Stroke	5.12 in x 5.91 in	130 mm x 150 mm
Aspiration	Turbocharged and Charge Air Cooled	
Oil System Capacity	48 U.S. Quarts	45.42 Liters
Length	55.1 in	1400 mm
Width	38.0 in	965 mm
Height	48.8 in	1240 mm
Weight (Wet)	2,797 lb	1,269 kg
(Dry)	2,640 lb	1,197 kg
(Aftertreatment System)***	125 lb	57 kg

QSX11.9 Maintenance Intervals

	Hours
Oil and Filter	500
Overhead Adjustment	3,000
Coalescing Filter	3,000
Diesel Particulate Filter	6,000

*Indicates a restricted rating

**Indicates a continuous rating

***Depending on configuration

All ratings are intermittent unless otherwise noted. Additional ratings may be available. Check with your Cummins distributor or dealer.



Cummins QSX15.

The QSX15 combines the best of all worlds – with low emissions, up to 5% better fuel economy, plus up to 2050 lb-ft (2779 N•m) of peak torque with a 50% torque rise. There are 12 ratings available to match the power demands of every type of heavy-duty application. The sophisticated XPI fuel system is capable of delivering fuel to the cylinder at high pressures, enabling multiple injection events per cycle. It also uses a new Direct Flow air filter, which has a smaller profile than conventional cylindrical units. For high-dust work environments, an optional pre-cleaner cover is available, which removes up to 90% of all particles before they even reach the filter, extending service intervals and reducing operating costs.

Cummins QSX15 for Tier 4 Interim/Stage IIIB is designed and built to deliver clear advantages versus our Tier 3 engines – in any type of industrial equipment, on every job.

QSX15 Ratings

ENGINE MODEL	RATED HP(KW) @ RPM	PEAK HP(KW) @ RPM	PEAK TORQUE LB-FT(N•M) @ RPM
QSX15 600*	600 (447) @ 1800	600 (447) @ 1800	2050 (2779) @ 1400
QSX15 580*	580 (433) @ 2100	600 (447) @ 1800	2050 (2779) @ 1400
QSX15 575*	575 (429) @ 1800	575 (429) @ 1800	1950 (2644) @ 1400
QSX15 550*	550 (410) @ 2100	590 (440) @ 1800	2050 (2779) @ 1400
QSX15 550*	550 (410) @ 1800	550 (410) @ 1800	1750 (2373) @ 1400
QSX15 535	535 (399) @ 2100	580 (433) @ 1800	1950 (2644) @ 1400
QSX15 525**	525 (391) @ 1800	525 (391) @ 1800	1750 (2373) @ 1400
QSX15 500**	500 (373) @ 1800	500 (373) @ 1800	1600 (2169) @ 1400
QSX15 500	500 (373) @ 2100	550 (410) @ 1800	1850 (2508) @ 1400
QSX15 450	450 (336) @ 2100	500 (373) @ 1800	1700 (2305) @ 1400
QSX15 450**	450 (336) @ 1800	450 (336) @ 1800	1500 (2034) @ 1400
QSX15 400	400 (298) @ 2100	440 (328) @ 1800	1500 (2034) @ 1400

QSX15 Specifications

Engine Type	In-Line, 6-Cylinder	
Displacement	915 cu in	15 Liters
Rated Power	400-600 hp	298-447 kW
Peak Torque	1500-2050 lb-ft	2035-2779 N•m
Bore and Stroke	5.39 in x 6.65 in	137 mm x 169 mm
Aspiration	Turbocharged and Charge Air Cooled	
Oil System Capacity	48 U.S. Quarts	45.42 Liters
Length	56.8 in	1443 mm
Width	40.6 in	1032 mm
Height	51.1 in	1298 mm
Weight (Wet)	3,166 lb	1,436 kg
(Dry)	3,009 lb	1,365 kg
(Aftertreatment System)**	125 lb	57 kg

QSX15 Maintenance Intervals

	Hours
Oil and Filter	500
Overhead Adjustment	6,000
Coalescing Filter	3,000
Diesel Particulate Filter	6,000

*Indicates a restricted rating

**Indicates a continuous rating

***Depending on configuration

All ratings are intermittent unless otherwise noted. Additional ratings may be available. Check with your Cummins distributor or dealer.

Cummins Particulate Filter.

The proven Cummins Particulate Filter reduces particulate matter by over 90%. This insulated filter is integrated with the Cummins VGT Turbocharger as a single electronic system, driven by the ECM to maximize particulate filter self-regeneration. Its rugged design has been optimized to handle any equipment shock and vibration loads. The Cummins Particulate Filter is passive up to 99% of the time, depending on duty cycle. No incremental actions are required by the operator to keep the Diesel Particulate Filter (DPF) clean. No burner is required to generate additional heat.

Every Confidence.

QSX11.9 and QSX15 engines come with a full 2-year/2,000-hour warranty that covers all Cummins branded components, including the engine and exhaust aftertreatment. Major components coverage continues into the third year, up to 10,000 hours of operation from the date each engine is put in service. Three simple steps explain everything you need to know:

Step One: Full coverage on all Cummins industrial engines and branded components with unlimited hours for the first year of operation. This includes Cummins branded electrics such as alternators, starters and the Cummins Particulate Filter.

Step Two: Full coverage is extended for the second year, up to 2,000 hours of operation. Total hours are cumulative from the date the engine goes in service.

Step Three: Major components coverage, including block, crankshaft, camshaft and rods on all products for the third year or up to 10,000 hours of operation. Total hours are cumulative from the date the engine goes in service.


Cummins Electronic Control Module (ECM)
Two times the speed, two times increased memory capability, three times faster processing power than the previous model.



Encompass Extended Coverage.

Encompass gives you a flexible choice of plans that include parts and labor, or parts, labor and travel coverage. Encompass protection plans are available with your choice of up to five years of extended coverage with unlimited hours.

Encompass protection plans may be purchased up to six months after the in-service date of your Cummins QSX11.9 or QSX15 engine. See your Cummins distributor for pricing. For additional details, ask to see our Industrial Encompass Protection Plan brochures.

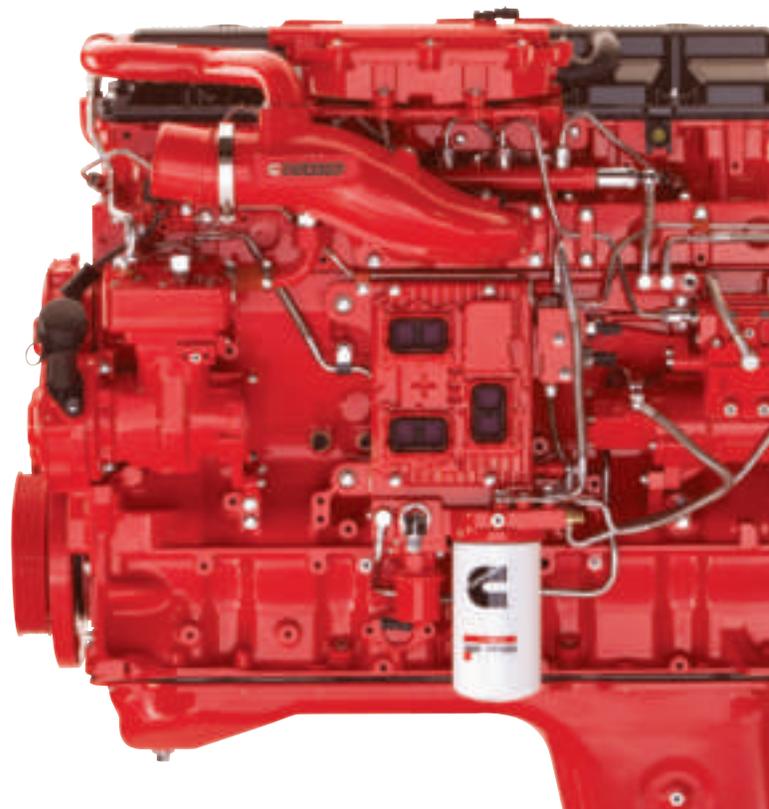

Tools At Your Fingertips.

QuickCheck 5200.

The QuickCheck 5200 handheld computer transforms the way you look at engine data. It has a brilliant color screen, faster processing speeds, greater memory and longer battery life than its predecessor.

The rugged, portable and user-friendly QuickCheck 5200 is fully compatible with any electronic engine. Powered by the Microsoft Windows CE operating system, the QuickCheck 5200 device features an integrated data link adapter that connects to your engine via J1587 or J1939 industry-standard data links for rapid, trouble-free data capture. No separate adapter is required.

QuickCheck is ready to operate for Tier 4 Interim and all previous engine platforms. For a demonstration or to buy Cummins QuickCheck 5200, see your Cummins dealer or distributor.



QuickServe® Online.

As a Cummins owner, you have access to one of the most comprehensive and powerful parts and service tools in the industry – Cummins QuickServe Online.

This is the same web site used by Cummins certified technicians to get parts and service information about your engine. And while it contains parts and service data for over 11 million engines, finding the information for your QSX11.9 or QSX15 engine takes just seconds.

The first step is to register your engine. Go to quickserve.cummins.com and click on "Create an Account." There you will see the different subscription plans you can choose from. You have the option to register for free or purchase one of the subscription plans to access additional information. Once you have registered, you simply enter the engine serial number listed on your data plate, and you will be able to view customized information about your engine at your convenience.

For an annual subscription fee, you can register for the Limited Owners Plan to get access to a cross-reference of Cummins ReCon® parts, service bulletins and the latest repair procedures. QuickServe Online even gives exploded parts diagrams to help with identification of components in subassemblies.

With the Limited Owners Plan, you can use the Shopping Cart feature to create a pick list of parts that you need. Distributor contact information is available online so you can review your parts list with your local Cummins distributor to make sure that you have every part needed to complete your engine repair. To register, visit quickserve.cummins.com.



INSITE.™

INSITE is a PC-based software application that provides quick and easy access to your engine's electronic performance information, which enables faster service turnaround times. INSITE helps ensure accurate procedures and diagnoses, and limits downtime while increasing productivity and profits.

Cummins INSITE software supplies engine information quickly, getting the inside details you need. No matter what kind of equipment you run, INSITE is the one support product to have in your virtual toolbox to fit every Cummins electronic engine regardless of emissions level.

Every Question. Answered.

To learn more about Tier 4 Interim/Stage IIIB, please see www.Tier4.info. If you have additional questions regarding Cummins engines, or want to register your engine, use one of the following methods to contact us:

Service Network – Cummins engines are backed by the strength of Cummins global network of over 6,600 service locations worldwide.

Cummins Care – For questions regarding your Cummins engine or for assistance in finding a repair facility, call Cummins Care at 1-800-DIESELS™ (1-800-343-7357).

Customers in Europe, the Middle East or Africa should call +44 (0) 1327 886464, or e-mail cabo.customerassistance@cummins.com.

For online assistance to Cummins-related questions, click on the “Contact Us” link in the header at cumminsengines.com.

Cummins Online Registration – Register all your Cummins engines quickly and easily at cumminsengines.com to ensure quality parts and service for your engine.





Cummins Inc.
Box 3005
Columbus, IN 47202-3005
U.S.A.

Phone: 1-800-DIESELS™ (1-800-343-7357)
Fax: 1-800-232-6393
Internet: cumminsengines.com

Cummins Ltd.
Yarm Road, Darlington
County Durham, DL1 4PW
UK


Phone: +44 (0) 1327 886464
Fax: +44 (0) 870 2413180
Internet: cabo.customerassistance@cummins.com

Bulletin 4087193 Printed in U.S.A. 3/11
©2011 Cummins Inc.



Every™ Power.

Cummins Power Products.

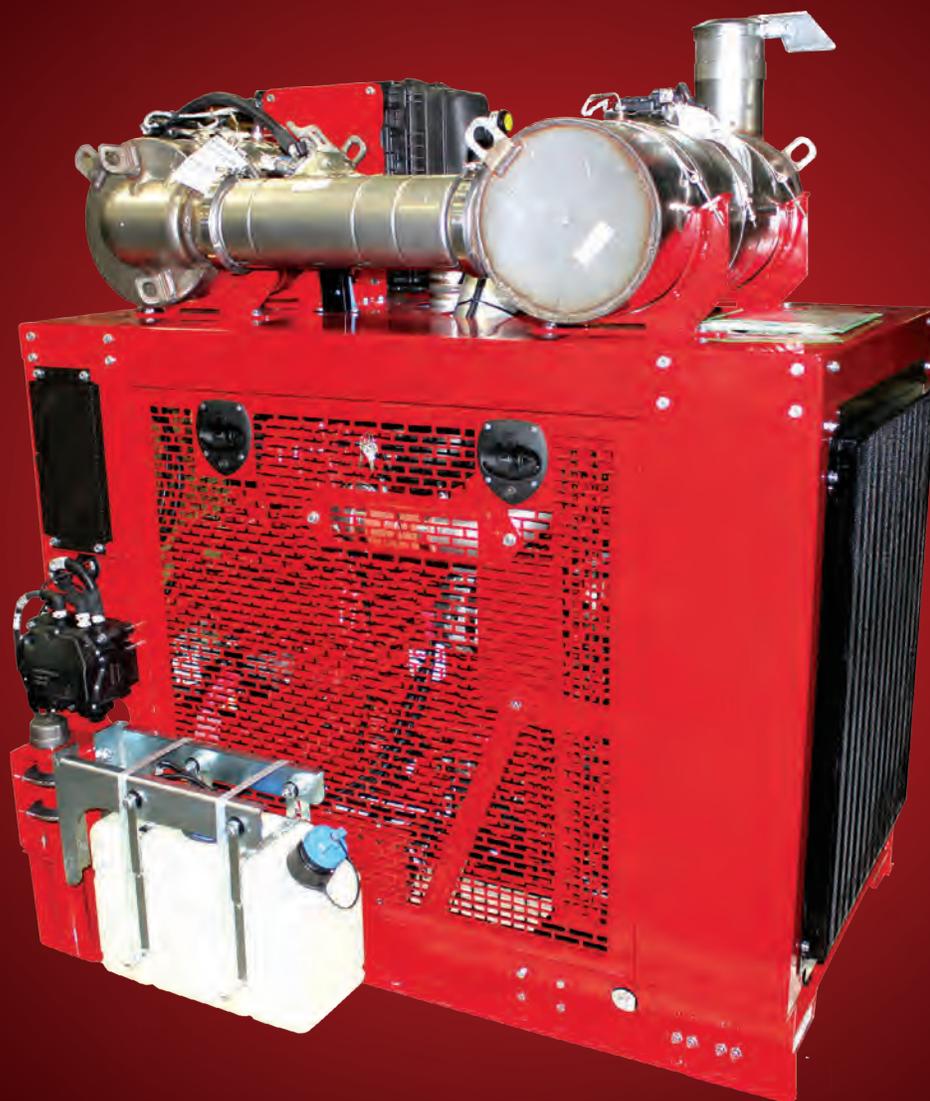



In today's business world, you need a total package – one that delivers value of ownership, the most advanced technology and second-to-none support. Cummins Power Products offers a total solution for your power-unit needs, with a full range of diesel and compressed gas products from 60 hp to 1500 hp (45-1119 kW) and options designed to meet your specific needs.

Power By Design.

What is a power unit? Essentially, a power unit is “torque in a box,” specifically engineered to provide a solution for a mechanical power need. Every product we make is powered exclusively by a Cummins engine, the most rugged, reliable and advanced technology available. Customized to the unique specifications necessary to meet your power demands, Cummins Power Products designs the right product, with the right fit, to do the job right, backed by our global parts and service network.

Ready For Tier 4 Final.

Our Tier 4 Final technology solution for power units builds on the proven durability of our Tier 3 and Tier 4 Interim power units. Cummins has a unique advantage in that we design and develop all of the critical engine subsystems and aftertreatment components. Cummins Power Products then upfits the base engine and validates the entire power unit design to offer a completely integrated power package. The total system is optimized to minimize installation impact and achieve the lowest cost of operation.

Every Application.

There is added value in working with Cummins Power Products. We eliminate the need to search for the right components. We have done that for you, and the result is a package designed specifically for your job. We offer turnkey solutions in both open and enclosed platforms from a standard line of base-engine models or a customized unit specifically engineered for a unique piece of equipment in virtually any application. We have the people, processes and products to make it happen. Cummins Power Products employs a qualified engineering staff with decades of experience in Pro/ENGINEER design. Our power units are built for everything from brush chippers and rock crushers to dewatering pumps and rail maintenance units. And if your need for power is larger than that, we also work on mud pumps, frac rigs and other heavy-duty applications.



Durable and reliable power for oil field equipment.



Locomotive and rail maintenance track packs keep business moving.


The Cummins Power Products Difference.

Quality. Experience. Support. All customized for you. We don't take these things lightly. Our quality standards are unmatched in the power unit industry. Through our state-of-the-art production processes and a battery of product tests, each power unit provides unparalleled quality and dependability. Since 1997, we have produced over 30,000 power units designed to unique standards. And each one has the backing of Cummins worldwide parts and service network to support you.


1,500 By Design. One For You.

With over 1,500 options available, a design may already exist to fit your exact need. We have already done the work to meet Tier 4 emissions requirements, with a number of models available. If no existing models meet your need, Cummins Power Products utilizes virtual prototyping to ensure a correct design and fit for your specific application. Our prototyping is very competitive, and allows close accuracy to the actual part production pricing. Some of the customizable options available include:

- Electronic or mechanical controls
- Cooling packages
- Mounting options
- Intake and exhaust locations
- Instrument panel locations

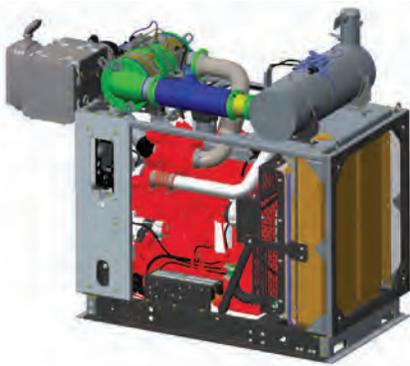

QSB6.7 Tier 4 Final Standard Package

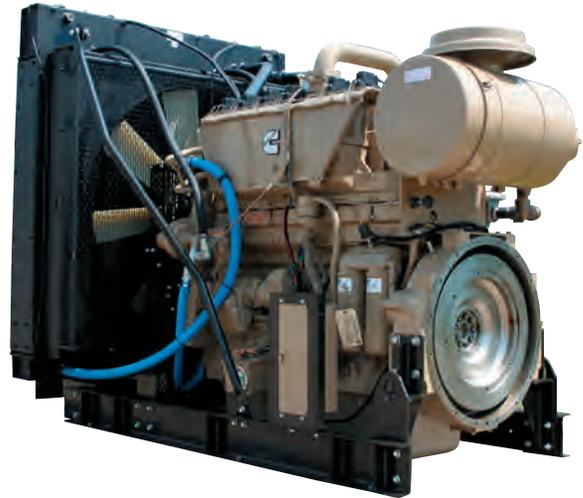

Every Strength.

There is power in our power units. Cummins Power Products power units last longer because they are built better. Our enclosure housings use 12-gauge steel. All metals are powder-coated, which increases chip resistance and allows our units to pass 1,000-hour salt spray tests. Components are bolted, not welded, so they resist mounting distortion and are easier to service. Each engine design is fully tested by Cummins Power Products to meet or exceed Cummins application guidelines. In addition, the electrical systems on each of our power units are tested before they leave our factory. Our power units are built and tested to handle the most extreme conditions.



Cummins Power Products' advanced engineering design process utilizes 3D prototyping in a virtual environment to customize each power unit to the exact needs of the customer and application.

Our Confidence. Total Coverage.

The warranty for Cummins Power Products power units mirrors the Cummins Industrial warranty. The first year is completely covered regardless of the number of hours run. Coverage continues through the second year or until 2,000 hours of operation have been reached (whichever occurs first).

World-Class Service. Every Time.

Cummins Power Products is a global provider of power units. Our value with customers overseas is realized in the dependability and durability of our products. We've shipped units to customers all over the world. Each power unit is backed by Cummins worldwide parts and service network. With over 6,600 authorized service locations around the world, your power unit will have support wherever you need it. Qualified technicians and Genuine Cummins Parts are never far away, even in the most remote location.



Every Advantage.

Cummins QuickServe® offers you factory-trained technicians, the most sophisticated diagnostic and repair tools in the industry and the largest international parts and service network of any engine manufacturer. Our worldwide team of mobile service technicians is always ready to deliver service when and where you need it. Every minute. Every day. Every year. Plus, Cummins distributors have access to an entire library of parts and service information for Cummins engines on the Internet. QuickServe Online provides engine part numbers, diagrams, service bulletins and alerts, up-to-date supersessions and more – 24 hours a day, for nearly 11 million Cummins engines. The Cummins Power Products web site is linked through QuickServe Online for rapid serial number identification.



Every Contact.

Cummins Power Products offer the best long-term value for your equipment needs and cost of ownership, whether your power unit is one of our standard configurations or designed specifically for your application and equipment. To learn more about Cummins Power Units, and to realize the power of our design, contact your local Cummins distributor location. Find out how we can design the exact power to work for you.

Cummins Power Products.

Engine Ratings Gross Horsepower (w/o Fan)

ENGINE MODEL	EMISSIONS TIER	HORSEPOWER RANGE (BHP)	HORSEPOWER RANGE (kW)	DISPLACEMENT (CU IN)	LENGTH (IN)	OPEN			ENCLOSED				
						WIDTH (IN)	HEIGHT (IN)	WEIGHT (LB)	LENGTH (IN)	WIDTH (IN)	HEIGHT (IN)	WEIGHT (LB)	CENTERLINE HEIGHT (IN)
Diesel Products													
QSF2.8 CAC	4F	49-74	37-55	171	50.15	38.00	50.60	1187	46.28	37.53	50.60	NA	12.5
QSF2.8 Non-CAC	4F	49-65	37-48	171	50.15	38.00	50.60	1187	46.28	38.53	50.60	NA	12.5
B3.3NA-P	4i	60-65	45-48	199	40.20	33.68	47.20	842	47.88	30.00	53.28	884	12.50
B3.3T-P	4i	74	55	199	40.20	33.68	47.60	842	36.98	30.00	53.28	884	12.50
B3.3TAA-P	3	75-85	56-63	199	53.24	39.49	58.56	1017	41.75	33.68	58.56	1121	12.50
QSB3.3-P	4i	85-120	63-89	199	NA	NA	NA	NA	43.82	29.46	53.05	NA	12.50
QSB3.3-P	3	80-110	60-82	199	53.24	39.49	58.56	1017	41.75	33.68	58.56	1121	12.50
QSF3.8	4F	74-130	55-97	232	65.60	52.00	50.50	1740	64.67	49.50	60.00	NA	13.13
B4.5-P	2	80	60	275	47.40	29.25	69.40	1208	47.44	31.54	58.13	1332	13.06
B4.5T-P	2	92-99	68-74	275	52.30	29.25	65.40	1208	43.00	31.55	60.34	1332	13.06
QSB4.5	4F	121-173	90-129	275	56.52	32.93	67.06	1860	56.52	32.93	67.06	1950	13
QSB4.5-P	4i	110-163	82-122	272	59.40	38.50	56.40	1431	53.80	35.00	56.40	1574	13.14
QSB4.5-P	3	110-170	82-127	272	57.45	31.88	65.40	1270	48.00	31.88	61.82	1461	13.14
QSB6.7	4F	173-300	129-223	408	81.00	45.27	69.06	2590	81.09	45.27	69.06	2750	14
QSB6.7-P	4i	146-173	109-129	409	65.31	40.82	57.13	1915	58.00	36.30	66.50	2165	14.10
QSB6.7-P	4i	190-300	142-223	409	65.31	40.82	57.13	1915	58.00	36.30	66.50	2165	14.10
QSB6.7-P	3	190-275	142-205	409	68.48	33.91	81.80	1800	58.00	33.91	69.91	2050	14.10
QSC8.3-P	3	305	172-227	506	77.25	41.32	82.26	2380	64.75	41.32	81.03	2755	16.50
QSL9	4F	250-380	186-283	543	86.11	53.57	76.41	3150	86.11	53.57	76.41	3573	16.5
QSL9-P	4i	230-380	172-283	543	74.20	41.30	61.70	NA	64.80	41.30	72.40	2794	16.50
QSL9-P	3	300-365	224-272	543	77.25	41.32	82.26	2380	64.75	41.32	81.03	2755	16.50
QSM11-P	3	300-400	224-298	660	77.38	46.88	70.07	3394	74.49	43.10	82.22	3718	20.00
QSX11.9	4i	350-500	261-373	726	85.90	48.00	78.50	4121	NA	NA	NA	NA	20.00
QSX15	4F	472-675	352-503	915	98.50	71.83	84.60	6250	98.50	71.83	84.60	6656	20
QSX15-P	4i	400-600	298-447	912	87.80	57.50	85.50	5034	NA	NA	NA	NA	20.00
QSX15-P	3	375-630	280-470	915	106.25	62.75	84.05	5140	106.25	62.75	94.29	5750	20.00
QSK19-P	3	560-700	418-522	1159	115.13	61.88	78.78	6570	NA	NA	NA	NA	16.02
QSK19-P	2	525-700	391-522	1150	116.13	62.81	78.64	7100	NA	NA	NA	NA	15.88
QSK19-P	2	755-800	563-597	1150	116.13	62.81	78.64	7200	NA	NA	NA	NA	16.00
QSK19-P	1	755-800	563-597	1150	114.25	62.00	78.52	6530	NA	NA	NA	NA	16.02
QSK23-P	2	760-950	567-708	1412	NA	NA	NA	NA	NA	NA	NA	NA	23.00
QST30-P	1	760-1200	567-895	1861	156.00	59.71	92.27	11400	NA	NA	NA	NA	27.00
QST30-P	1	1350-1500	1007-1119	1861	131.34	95.00	110.66	16120	NA	NA	NA	NA	27.00
QST30-P	2	760-1200	567-895	1861	142.00	82.00	96.71	11400	NA	NA	NA	NA	27.00
QST30-P	2	1350-1500	1007-1119	1861	NA	NA	NA	NA	NA	NA	NA	NA	27.00
QSK38-P	2	920	686	2300	146.66	86.13	103.06	NA	NA	NA	NA	NA	30.00
Natural Gas Products													
G5.9	NA	41-99	31-74	359	65.74	33.91	64.72	1530	64.52	33.91	70.41	1641	17.65
G5.9e	NA	70-99	52-74	359	NA	NA	NA	NA	68.02	33.91	69.51	1899	17.65
G8.3	NA	99-135	74-101	505	67.38	41.32	73.80	1860	60.69	41.32	71.75	2525	17.75
G8.3e	NA	99-118	74-88	505	NA	NA	NA	NA	72.81	41.32	69.26	2444	17.75
GTA8.3 SLB	NA	175	131	505	78.50	48.88	71.50	NA	77.25	43.90	75.50	NA	17.75
G855	NA	157-188	117-140	855	92.50	42.76	66.38	3900	NA	NA	NA	NA	22.38
G855e	NA	157-188	117-140	855	83.17	42.70	77.59	3944	NA	NA	NA	NA	22.38
GTA855	NA	213-286	159-213	855	100.00	59.76	74.25	4596	NA	NA	NA	NA	22.38
GTA855e	NA	225	168	855	93.00	62.25	84.75	NA	NA	NA	NA	NA	22.38
KTA19GC	NA	265-420	198-313	1125	112.57	60.00	74.87	6495	NA	NA	NA	NA	21.13
KTA19GC SLB	NA	380-420	283-313	1125	104.96	62.25	80.50	6495	NA	NA	NA	NA	21.13
KTA38GC SLB	NA	635-850	474-634	2300	153.78	85.25	100.75	16500	NA	NA	NA	NA	29.89
KTA38GC-E	NA	635-760	474-567	2300	NA	NA	NA	NA	234.60	85.50	152.30	26,114	29.89

- Dimensions and weights will vary slightly depending on the exact engine configuration.
- All ratings are restricted unless otherwise noted. Some ratings are intermittent.
- Height dimensions are measured from bottom of rail to highest point on unit, usually the muffler.
- Natural gas power unit centerline height indicated with high-capacity oil pans.
- 4i Refers to Tier 4 Interim EPA 2011 emissions standards.
- T4F refers to Tier 4 Final EPA 2014 emissions standards.
- * Anticipated 2014 releases planned.



Cummins Inc.
Box 3005
Columbus, IN 47202-3005
U.S.A.

Phone: 1-800-DIESELS™ (1-800-343-7357)
Fax: 1-800-232-6393
Internet: cumminsenines.com

[Twitter.com/CumminsEngines](https://twitter.com/CumminsEngines)
[YouTube.com/CumminsEngines](https://www.youtube.com/CumminsEngines)

Bulletin 4087018 Printed in U.S.A. Rev. 8/16
©2016 Cummins Inc.